

# Safety Valves

## DN 15



---



**BUKO**



# Safety Valves 1/2 x 1/2" KE-PTFE

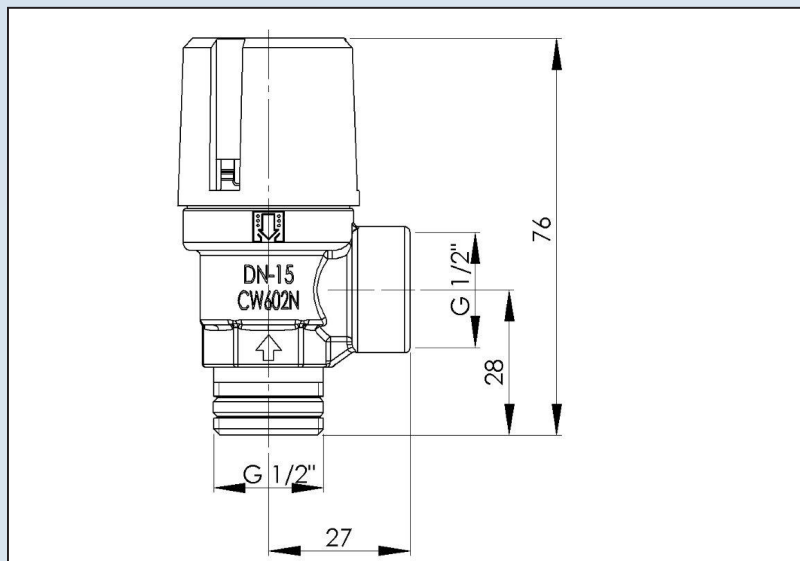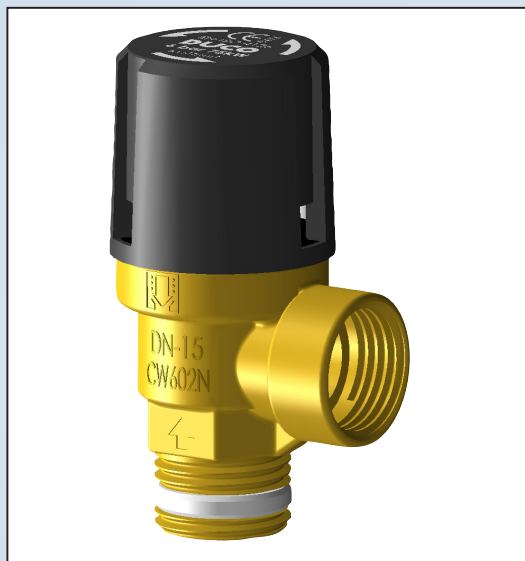

Duco safety valves to protect closed heated and chilled water systems against excessive pressure.


## Application

The safety valve has to be used in a closed heating or cooling system (glycol max. 50%) Only use the Duco valve in a dry and frostfree location.

Min / max. system temp.: -10°C / +120°C

## Safety

Check whether the max. capacity and the opening pressure that are indicated on the valve match the values of the system.



All Duco safety valves meet the requirements of the Pressure Equipment Directive (PED)

"Directive 2014/68/EU Module B/Module D"

The quality system also complies with the NEN-EN-ISO 9001

NORM: NEN-EN-ISO 4126-1

<i>Code</i>	<i>Set pressure (bar)</i>	<i>Heating capacity (kW)</i>
1035-0-61-11	0,5	48
1035-0-62-11	1	64
1035-0-64-11	2	93
1035-0-65-11	2,5	107
1035-0-66-11	3	120
1035-0-68-11	4	148
1035-0-70-11	5	175
1035-0-76-11	6	200
1035-0-77-11	7	226
1035-0-78-11	8	252
1035-0-79-11	9	278
1055-0-80-11	10	302

PenTec bv  
Edisonweg 7  
3442 AC Woerden  
The Netherlands

Tel. +31 (0)182 503 100  
E-mail [info@pentecbv.nl](mailto:info@pentecbv.nl)  
Internet [www.duco.nl](http://www.duco.nl)  
[www.pentecbv.nl](http://www.pentecbv.nl)

