



Filling Valve DN15

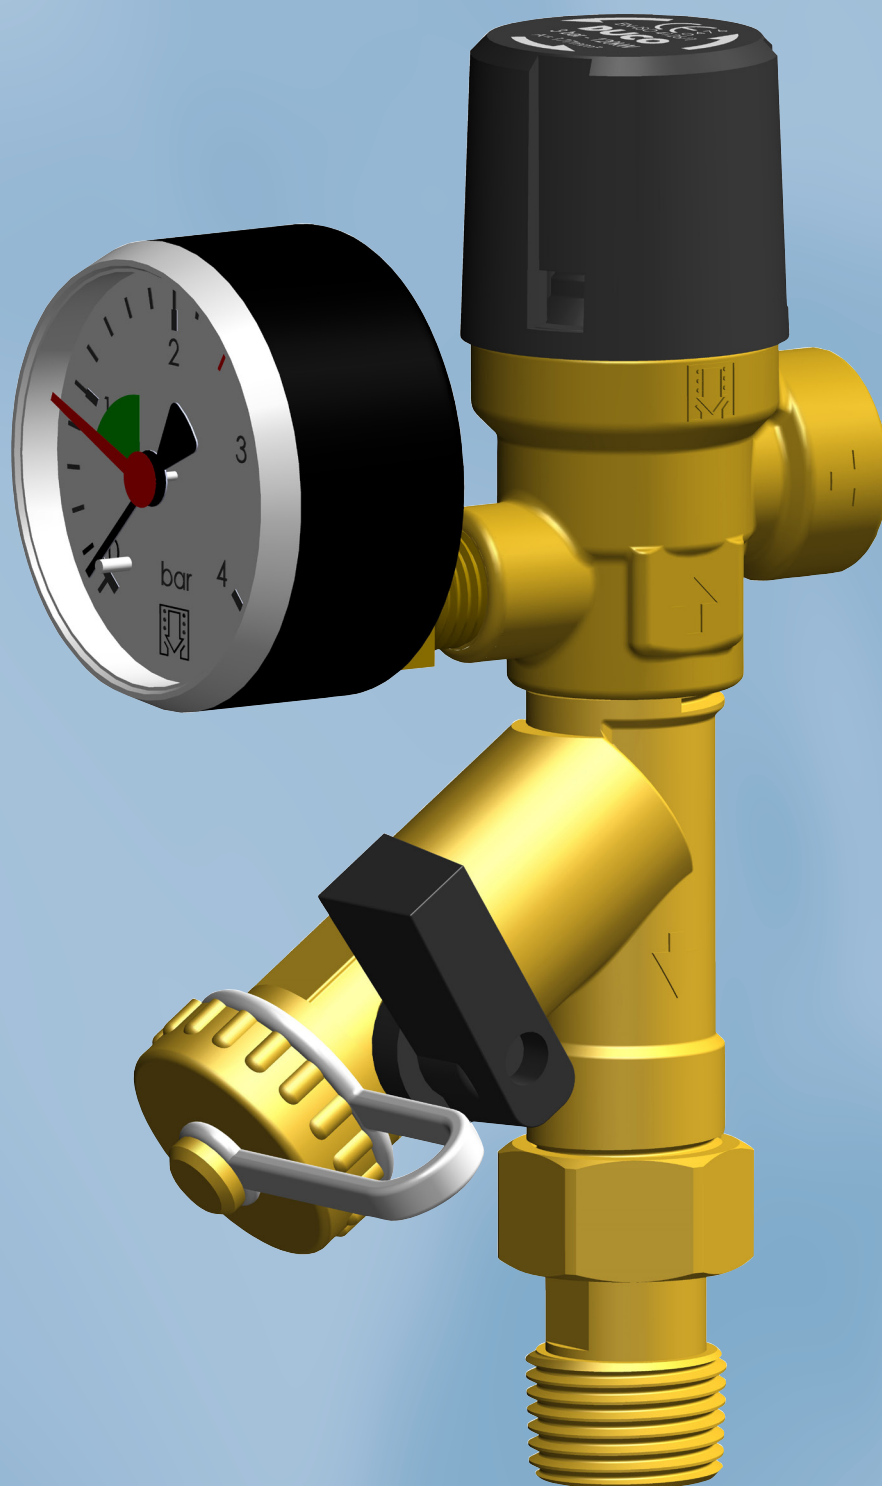

Filling Valve UKAM

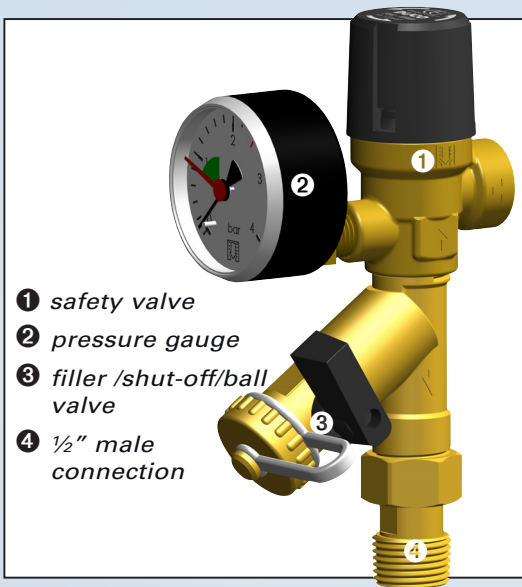

The UKAM is a filling device with 3 bar safety valve, shut-off ball valve and pressure gauge 0 - 4 bar.
Connection : ½" male.

Application

The safety valve has to be used in a closed heating or cooling system (glycol max. 50%) Only use the Duco valve in a dry and frostfree location.
Min / max. system temp.: -10°C / +120°C


Safety

Check whether the max. capacity and the opening pressure that are indicated on the valve match the values of the system.



All Duco safety valves meet the requirements of the Pressure Equipment Directive (PED)
 "Directive 2014/68/EU Module B/Module D"
 The quality system also complies with the NEN-EN-ISO 9001

NORM: NEN-EN-ISO 4126-1

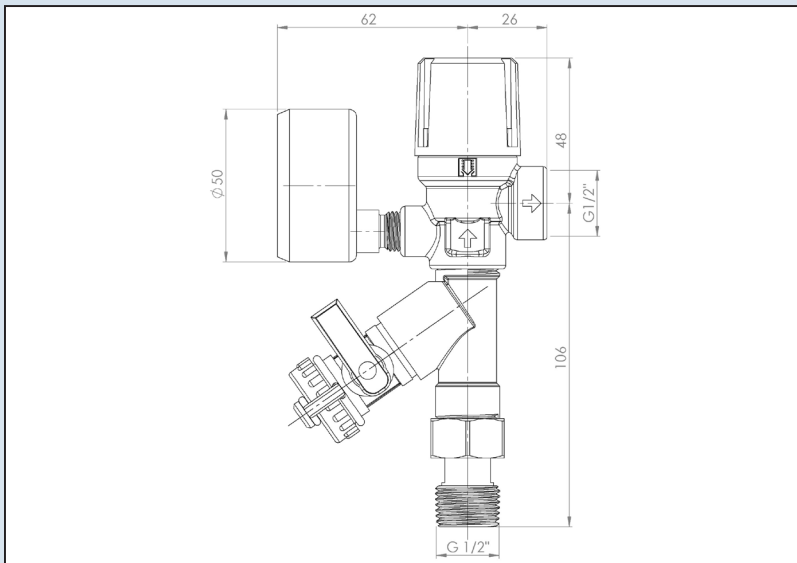

<i>Code</i>	<i>Set pressure (bar)</i>	<i>Heating capacity (kW)</i>
<i>1500-0-40-12</i>	<i>3</i>	<i>120</i>

Tel. +31 (0)182 503 100
E-mail info@pentecbv.nl
Internet www.duco.nl
www.pentecbv.nl

PenTec bv
Edisonweg 7
3442 AC Woerden
The Netherlands

A large, bold, red graphic of the letters 'OS' in a stylized, rounded font. The 'O' is a solid circle with a smaller white circle inside. The 'S' is composed of two thick, curved strokes that meet at a central point. The entire graphic is set against a light blue background.